


... Maßstab für innovative Befestigungstechniken

Schulterpassschrauben ISO 7379

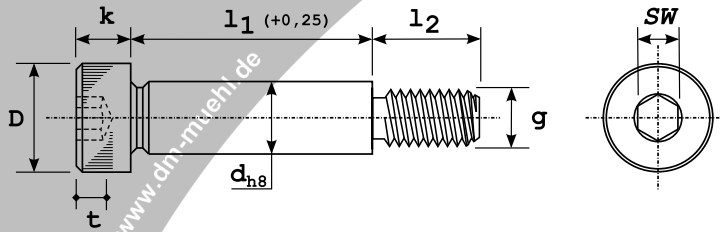

Festigkeitsklasse: 12.9

Toleranz : h8

d_{h8} [mm]	5	6	8	10	12	16	20	24
g [mm]	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
$d_{h8 \max}$ [mm]	5,000	6,000	8,00	10,000	12,000	16,000	20,000	24,000
$d_{h8 \min}$ [mm]	4,982	5,982	7,978	9,978	11,973	15,973	19,967	23,967
l_2 [mm]	8	9,5	11	13	16	18	22	27
D [mm]	9	10	13	16	18	24	30	36
k [mm]	4	4,5	5,5	7	9	11	14	16
$t \min.$ [mm]	2,2	2,4	3,3	4,2	4,9	6,6	8,8	10
SW [mm]	2,5	3,0	4,0	5,0	6,0	8,0	10,0	12
MA [Nm]	-	6,5	12	30	60	105	250	480
l_1 [mm]								
6		25						
8		25	25					
10	25	25	25	25				
12	25	25	25	25	25			
15	25	25	25	25	25			
16	25	25	25	25	25	10		
20	25	25	25	25	25	10		
25	25	25	25	25	25	10		
30	25	25	25	25	25	10	10	
35	25	25	25	25	25	10	10	
40	25	25	25	25	25	10	10	10
45	25	25	25	25	25	10	10	10
50	25	25	25	25	25	10	10	10
55		25	25	25	25	10	10	10
60		25	25	25	25	10	10	10
65		25	25	25	25	10	10	10
70		25	25	25	25	10	10	10
80		25	25	25	25	10	10	10
90			25	25	25	10	10	10
100			25	25	25	10	10	10
110				25	25	10	10	10
120				25	25	10	10	10
140					25	10	10	10
160						10	10	10
200						10	10	10

Stück je Verpackungseinheit

MA = empfohlenes Anziehdrehmoment



Ihre Wunschabmessung ist nicht dabei? Bitte treten Sie mit uns in Kontakt und wir werden eine Lösung finden!

Bsp. Bestell-Nr.: ISO 7379-12.9-h8- d_{h8} - g x l_1
 5 - M 4 x 10