


... Maßstab für innovative Befestigungstechniken

Zylinderstifte, DIN 6325

gehärtet (60 ±2HRC) und geschliffen

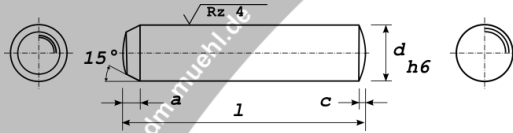

Material:
Toleranz :

Vergütungsstahl
h6

d _[mm]	1	1,5	2	2,5	3	4	5	6	8	10	12
d _{h6} max. [mm]	1,000	1,500	2,000	2,500	3,000	4,000	5,000	6,000	8,000	10,000	12,000
d _{h6} min. [mm]	0,994	1,494	1,994	2,494	2,994	3,992	4,992	5,992	7,991	9,991	11,989
c~ [mm]	0,15	0,23	0,3	0,4	0,45	0,6	0,75	0,9	1,2	1,2	1,8
a~ [mm]	0,48	0,62	0,78	0,95	1,1	1,4	1,7	2,1	2,6	3	3,8
l [mm]											
4	500	500	500								
5	500	500	500								
6	500	500	500	500	500	200					
8	500	500	500	500	500	200					
10	500	500	500	500	500	200	200	100			
12	500	500	500	500	500	200	200	100			
14		500	500	500	500	200	200	100	100		
16		500	500	500	500	200	200	100	100	50	
18		500	500		500	200	200	100	100		
20		500	500	500	500	200	200	100	100	50	50
22					500	200	200	100	100		
24			500	500	500	200	200	100	100	50	50
26					500			100		50	
28			500		500	200	200	100	100	50	50
30			500	500	500	200	200	100	50	50	50
32					500	200	200	100	50	50	50
36					500	200	100	100	50	50	50
40			500		500	200	100	100	50	50	50
45					500	200	100	100	50	50	50
50					500	200	100	100	50	50	50
55							100	100	50	50	50
60						200	100	100	50	50	50
70								100	50	50	50
80							100	100	50	50	50
90									50	50	
100								100	50	50	50
120									50	50	
140											



Stück je Verpackungseinheit



- weitere Abmessungen auf Anfrage!

Bsp. Bestell-Nr.: DIN 6325 3 h6 x 10