


... Maßstab für innovative Befestigungstechniken

Zylinderstifte, mit Innengewinde DIN 7979 -D / ISO 8735 -A und Luftentweichungsfläche, gehärtet (60HRC) und geschliffen

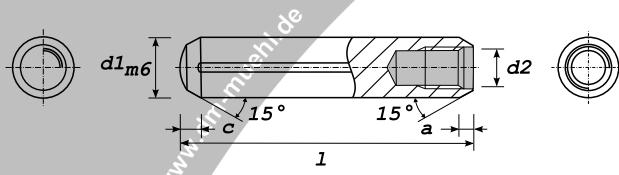

Material:
Toleranz :

Vergütungsstahl
m6

d_1 [mm]	3	4	5	6	8	10	12	14	16	20	25
d_{m6} max. [mm]	3,008	4,012	5,012	6,012	8,015	10,015	12,018	14,018	16,018	20,021	25,021
d_{m6} min. [mm]	3,002	4,004	5,004	6,004	8,006	10,006	12,007	14,007	16,007	20,008	25,008
d_2 [mm]	M 2	M 3 ¹⁾	M 3	M 4	M 5	M 6	M 6	M 8	M 8	M 10	M 16
c [mm]	-	1,3	1,7	2,1	2,6	3	3,8	4	4,7	6	6
a [mm]	-	0,6	0,6	0,8	1	1,2	1,6	1,8	2	2,5	3
l [mm]	10	250	250	250	200						
12	250	250	250	200	200						
14	250	250	250	200	200						
16	250	250	250	200	200	100					
18	250	250	250	200	200						
20	250	250	250	200	200	100	100				
22				200	200						
24	250	250	250	200	200	100	100				
25		250		200	200	100					
26				200	200						
28	250	250	250	200	200	100	100	50	50		
30	250	250	250	200	200	100	100		50		
32	250	250	250	200	200	100	100	50	50		
35				200	200						
36	250	250	250	200	200	100	100	50	50	50	
40	250	250	250	200	200	100	100	50	50	50	25
45		250	200	200	100	100	50	50	50	50	25
50		250	250	200	200	100	100	50	50	50	25
55		250	200	100	50	100	50	50	50	50	25
60		250	250	200	100	50	50	50	25	25	25
65				100							
70			250	200	100	50	50	50	25	25	25
75											25
80				200	100	50	50	50	25	25	25
85								50			25
90				200	100	50	50	50	25	25	25
100			250	200	100	50	50	25	25	25	25
110					100	50			25	25	
120				200	100	50	50	25	25	25	25
130									25	25	
140					100	50	50		25	25	25
160						50	50		25	25	25
180									25	25	25
200									25	25	

Stück je Verpackungseinheit

¹⁾ vereinzelte Abmessungen in M2,5

- weitere Abmessungen auf Anfrage!
- **Sicherungsspannstifte** zum einschlagen -> WKN 1481C



Bsp. Bestell-Nr.: DIN 7979 -D 3 m6 x 10

