


... Maßstab für innovative Befestigungstechniken

Zylinderstifte, mit Innengewinde DIN 7979 -C / ISO 8733
mit Luftentweichungsfläche*, geschliffen

ungehärtet

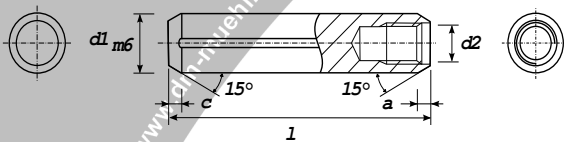

Material:

Variante1 = rostfrei

Variante2 = Automatenstahl

Toleranz :

m6

d1 [mm]	4		5		6		8		10		12		14		16		20		25		
d _{m6} max. [mm]	4,012		5,012		6,012		8,015		10,015		12,018		14,018		16,018		20,021		25,021		
d _{m6} min. [mm]	4,004		5,004		6,004		8,006		10,006		12,007		14,007		16,007		20,008		25,008		
d2 [mm]	M 3 ¹⁾		M 3		M 4		M 5		M 6		M 6		M 8		M 8		M 10		M 16		
c~ [mm]	0,8		1		1,2		1,6		2		2,5		2,5		3		3,5		4		
a~ [mm]	0,6		0,6		0,8		1		1,2		1,6		1,8		2		2,5		3		
Variante	V1	V2	V1	V2	V1	V2	V1	V2	V1	V2	V1	V2	V1	V2	V1	V2	V1	V2	V1	V2	
l [mm]																					
10			X		X																
12	X		X		X																
14	X		X		X																
16	X		X		X	X	X	X	X												
18			X		X	X	X	X	X												
20	X		X	X	X	X	X	X	X	X	X										
22																					
24	X		X	X	X	X	X	X	X	X	X										
25			X																		
26																					
28			X		X	X	X	X	X	X	X										
30			X		X		X		X		X	X						X			
32			X	X	X	X	X	X	X	X	X				X						
35																					
36			X	X	X	X	X	X	X	X	X		X		X						
40			X	X	X	X	X	X	X	X	X		X		X		X				
45			X	X	X	X	X	X	X	X	X		X		X		X				
50			X	X	X	X	X	X	X	X	X		X		X		X				
55			X		X		X		X		X										
60			X	X	X	X	X	X	X	X	X		X		X		X		X	X	
65																					
70						X	X	X	X	X	X		X		X		X		X	X	
75																					
80					X		X	X	X	X	X		X		X		X		X	X	
85																					
90							X								X		X				
100							X			X		X		X						X	
110																					
120																				X	
Stück je Verpackungseinheit	100		100		100		50		50		50		50		25		25		25		10

* Variante 1: vereinzelt ohne Luftentweichungsfläche



- weitere Abmessungen auf Anfrage!

Bsp. Bestell-Nr.:	d	l
DIN 7979 -C	6 m6	x 20
DIN 7979 -A2	4 m6	x 16