


... Maßstab für innovative Befestigungstechniken

Zylinderstifte, Edelstahl ISO 8734 -A- Stahl gehärtet (550-650HV30)

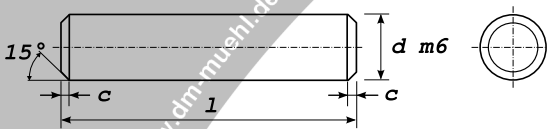

Material: Stahl
(vorzugsweise 1.3505)
Toleranz : m6

d [mm]	1,5	2	2,5	3	4	5	6	8	10	12	14	16	20	25
C~ [mm]	0,3	0,35	0,4	0,5	0,63	0,8	1,2	1,6	2	2,5	2,75	3	3,5	4
l [mm]														
4	500	500												
5	500	500	500	500										
6	500	500	500	500	500									
8	500	500	500	500	500	250	250							
10	500	500	500	500	500	250	250							
12	500	500	500	500	500	250	250							
14	500	500	500	500	500	250	250							
16	500	500	500	500	500	250	250	200						
18	500	500	500	500	500	250	250	200	200					
20	500	500	500	500	500	250	250	200	200					
22	500	500	500	500	500	250	250	200	200					
24	500	500	500	500	500	250	250	200	200	100	50	50		
26		500	500	500	500	250	250	200	200	100	50	50		
28		500	500	500	500	250	250	200	200	100	50	50		
30		500	500	500	500	250	250	200	200	100	50	50		
32		500	500	500	500	250	250	200	200	100	50	50		
35									200	100				
36				500	500	250	250	200	200	100	50	50	25	25
40				250	250	250	250	200	200	100	50	50	25	25
45				250		100	100	200	200	100	50	50	25	25
50						100	100	100	200	100	50	50	25	25
55							100	100	100	100	50	50	25	25
60									100	100	50	50	25	25
70											50	50	25	25
80											25	25	25	25
90											25	25	25	
100											25	25	25	
120											25	25	25	



Stück je Verpackungseinheit



weitere Abmessungen, andere Toleranzen auf Anfrage!



Bsp. Bestell-Nr.: ISO 8734 - EI $\frac{d}{3}$ m6 x $\frac{l}{10}$