


... Maßstab für innovative Befestigungstechniken



Zylinderstifte, Edelstahl ISO 8734 rostfrei und gehärtet (53 – 57 HRC)

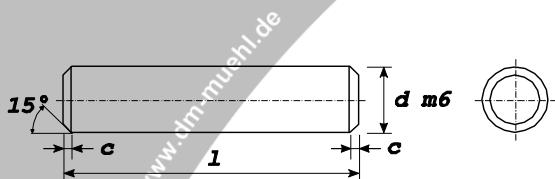

Material: 1.4034 (geh.)
Toleranz : m6

| d [mm] | 1 | 1,5 | 2 | 2,5 | 3 | 4 | 5 | 6 | 8 | 10 | 12 |
|---------------|-----|-----|------|-----|-----|------|------|-----|-----|----|-----|
| c [mm] | 0,2 | 0,3 | 0,35 | 0,4 | 0,5 | 0,63 | 0,98 | 1,2 | 1,6 | 2 | 2,5 |
| l [mm] | 4 | 250 | 250 | 250 | | | | | | | |
| 5 | 250 | 250 | 250 | 250 | 250 | | | | | | |
| 6 | 250 | 250 | 250 | 250 | 250 | 200 | | | | | |
| 8 | 250 | 250 | 250 | 250 | 250 | 200 | 200 | | | | |
| 10 | 250 | 250 | 250 | 250 | 250 | 200 | 200 | 100 | | | |
| 12 | 250 | 250 | 250 | 250 | 250 | 200 | 200 | 100 | | | |
| 14 | 250 | 250 | 250 | 250 | 250 | 200 | 200 | 100 | | | |
| 16 | 250 | 250 | 250 | 250 | 250 | 200 | 200 | 100 | 100 | | |
| 18 | | 250 | 250 | 250 | 250 | 200 | 200 | 100 | 100 | | 50 |
| 20 | | 250 | 250 | 250 | 250 | 200 | 200 | 100 | 100 | 50 | |
| 22 | | | | 250 | 250 | 200 | 200 | 100 | | | |
| 24 | | | | 250 | 250 | 200 | 200 | 100 | 100 | 50 | |
| 26 | | | | 250 | 250 | 200 | 200 | 100 | 100 | | |
| 28 | | | | | 250 | 200 | 200 | 100 | 50 | 50 | |
| 30 | | | | 250 | 250 | 200 | 200 | 100 | 50 | 50 | |
| 32 | | | | | 250 | 200 | 200 | 100 | 50 | 50 | |
| 36 | | | | | 250 | 250 | 100 | 100 | 50 | 50 | |
| 40 | | | | | | 250 | 100 | 100 | 50 | 50 | 50 |
| 45 | | | | | | | 100 | 100 | 50 | | |
| 50 | | | | | | | | 100 | 50 | 50 | 50 |
| 55 | | | | | | | | | 100 | | |
| 60 | | | | | | | | | 100 | 50 | 50 |
| 70 | | | | | | | | | | 50 | |
| 80 | | | | | | | | | 50 | 50 | 50 |
| 90 | | | | | | | | | | | |

Stück je Verpackungseinheit



weitere Abmessungen, andere Toleranzen auf Anfrage!



Bsp. Bestell-Nr.:

d l
ISO 8734 - C1 3 m6 x 10