


... Maßstab für innovative Befestigungstechniken

## Kegelstifte, mit Innengewinde DIN 7978 A / ISO 8736 A

ungehärtet, Oberfläche geschliffen

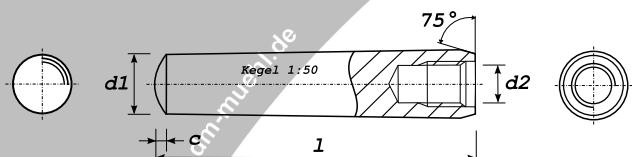

**Material:**  
**Toleranz :**

**Automatenstahl**  
**h10**

$d_1$ [mm]	5	6	8	10	12	13	16	20	25
$d_{h10}$ max. [mm]	5,000	6,000	8,000	10,000	12,000	13,000	16,000	20,000	25,000
$d_{h10}$ min. [mm]	4,952	5,952	7,942	9,942	11,930	12,930	15,930	19,916	24,916
$d_2$ [mm]	M 3	M 4	M 5	M 6	M 6	M 8	M 10	M 12	M 16
$a$ ~ [mm]	0,75	0,8	1	1,2	1,6	1,6	2	2,5	3,5
$l$ [mm]									
16	200	200							
20	200	200	100						
24	200	200	100	100					
26		200	100						
28		200	100	100					
30	200	200	100	100					
32	200	200	100	100	50				
36	200	200	100	100	50				
40	200	200	100	100	50	25	25	25	
45		200	100	100	50		25		
50	200	200	100	100	50	25	25	25	10
55		200	100	100	50		25		
60	200	200	100	100	50	25	25	25	10
70		200	100	100	50	25	25	25	10
80		200	100	100	50	25	25	25	10
90		200	100	100	50	25	25	25	10
100		200	100	100	50	25	25	25	
110			100	50		25	25		
120			100	50		25	25		
130				50		25			
140				100	50				10

Stück je Verpackungseinheit



- weitere Abmessungen auf Anfrage!
- ebenfalls **gehärtete** Ausführung lieferbar!

Bsp. Bestell-Nr.: DIN 7978 -A 6 x 40